Huilong LED Product Catalog

LED Module / Lightbox Light Source / Advertising Light Source

Shenzhen Huilong Optoelectronics Co., Ltd. | www.huilongled.com

Email: hlled888@163.com Tel: +86 13760292689 / +86 13424167596

Shenzhen Huilong Optoelectronics Co., Ltd.

Lightbox Light Source Series

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-2285-3030-220V



Product model: HL-2285-3030-220V
voltage: AC220V/110V
current: 100mA
power: 2.8W
colour: 3000K/4000K/6000K/10000K
specifications: 85*22MM
Luminous angle: 160°
Waterproof level: IP65
Luminous and bright: 300LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-2495-3030-220V



Product model: HL-2495-3030-220V
voltage: AC220V/110V
current: 100mA
power: 2.8W
colour: 3000K/4000K/6000K/10000K
specifications: 95*24MM
Luminous angle: 10*60°
Waterproof level: IP65
Luminous and bright: 300LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-2257-3030 220V



Product model: HL-2257-3030 220V
voltage: AC220V/110V
current: 15mA
power: 2W
colour: 3000K/4000K/6000K/10000K
specifications: 57*22MM
Luminous angle: 160°
Waterproof level: IP66
Luminous and bright: 300LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.


HL-2466-3030



Product model: HL-2466-3030
voltage: AC220V/110V
current: 15mA
power: 2W
colour: 3000K/4000K/6000K/10000K
specifications: 66*24MM
Luminous angle: 10*60°
Waterproof level: IP66
Luminous and bright: 300LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-7070-3030-220V

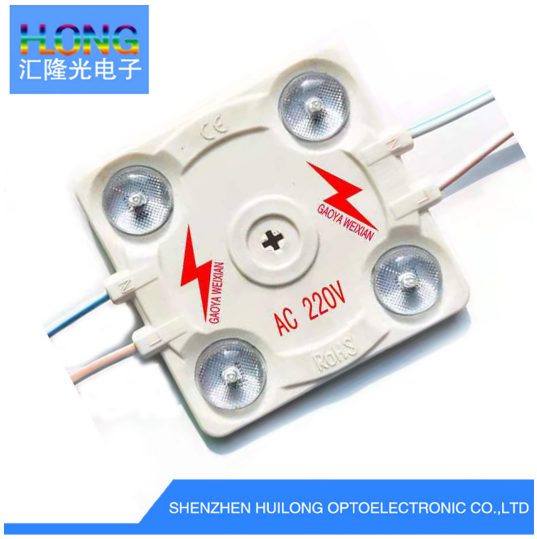

Product model: HL-7070-3030-220V模组
voltage: AC220V
current: 100mA
power: 3.6W
colour: 3000K/4000K/6000K/10000K
specifications: 70*70MM
Luminous angle: 160°
Waterproof level: IP66
Luminous and bright: 300LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-38384-2835



Product model: HL-38384-2835
voltage: DC12V/24V
current: 80mA
power: 1.5W
colour: White light/red light/green light/blue light/yellow light
specifications: 38*38MM
Luminous angle: 150°
Waterproof level: IP66
Luminous and bright: 180ML
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-M5235I-56TA



Product model: HL-M5235I-56TA
voltage: DC12V
current: 250mA
power: 3W
colour: 6000K/10000K
specifications: 52*35MM
Luminous angle: 15°-16°
Waterproof level: IP66
Luminous and bright: 250LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-3045-3030



Product model: HL-3045-3030
voltage: DC12V/24V
current: 120mA
power: 1.5W
colour: 3000K/4000K/6000K/10000K
specifications: 45*30MM
Luminous angle: 10*60°
Waterproof level: IP66
Luminous and bright: 150LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-4525-3030



Product model: HL-4525-3030
voltage: DC12V
current: 120mA
power: 1.4W
colour: 3000K/4000K/6000K/10000K
specifications: 45*25MM
Luminous angle: 10*60°
Waterproof level: IP65
Luminous and bright: 150LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

Advertising Light Source Series

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-38384-50RGB



Product model: HL-3838-50RGB
voltage: DC12V/24V
current: 100mA
power: 0.96W
colour: RGB
specifications: 38*38MM
Luminous angle: 150°
Waterproof level: IP66
Luminous and bright: 100LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-38384-5050



Product model: HL-38384-5050
voltage: DC12V
current: 80
power: 0.96W
colour: White light/red light/green light/blue light/yellow light
specifications: 38*38MM
Luminous angle: 160°
Waterproof level: IP66
Luminous and bright: 100LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-37374-5730



Product model: HL-3737-5730
voltage: DC12V/24V
current: 150mA
power: 2W
colour: White light/red light/green light/blue light/yellow light
specifications: 37*37MM
Luminous angle: 160°
Waterproof level: IP66
Luminous and bright: 200LM
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1275-5050-DMX512



Product model: HL-1275-5050-DMX512
voltage: DC12V/24V
current: 60mA
power: 9.6W
colour: FULL COLOR
specifications: 12*75
Luminous angle: 150°
Waterproof level: IP65
Product certificate: CE ROHS FCC CB
Cascade quantity: 20pcs
output voltage: 12-24V

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1455-2835



Product model: HL-1455-2835
voltage: DC12V/24V
current: 60mA
power: 1W
colour: White light/red light/green light/blue light/yellow light
specifications: 14*55
Luminous angle: 140°
Waterproof level: IP65
Luminous and bright: 150LM
Product certificate: CE ROHS FCC CB
Cascade quantity: 20pcs
output voltage: 12V

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1526-2835



Product model: HL-1526-2835
voltage: DC12V/24V
current: 50mA
power: 0.5W
colour: White light/red light/green light/blue light/yellow light
specifications: 15*26
Luminous angle: 170°
Waterproof level: IP67
Luminous and bright: 50lm
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs
output voltage: 12-24V

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-2607-2835



Product model: HL-2607-2835
voltage: DC12V
colour: White light/red light/green light/blue light/yellow light
specifications: 26*07MM
Luminous angle: 140°
Waterproof level: IP65
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1770B-5730



Product model: HL-1770B-5730
voltage: DC12V
colour: White light/red light/green light/blue light/yellow light
specifications: 70*17MM
Luminous angle: 150°
Waterproof level: IP65
Product certificate: CE ROHS FCC
Cascade quantity: 50pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL1770A-5730



Product model: HL-1770A-5730
voltage: DC12V
colour: White light/red light/green light/blue light/yellow light
specifications: 70*17MM
Luminous angle: 160°
Waterproof level: IP68
Product certificate: CE ROHS FCC
Cascade quantity: 50pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL7318-RGBW



Product model: HL-7318-RGBW
voltage: DC12V
colour: RGBW
specifications: 73*18MM
Luminous angle: 150°
Waterproof level: IP65
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-7318-RGBWW



Product model: HL-7318-RGBWW
voltage: DC12V
power: 0.96W
colour: RGBWW
specifications: 73*18MM
Luminous angle: 160°
Waterproof level: IP65
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-6842-2835



Product model: HL-6842-2835
voltage: DC12V
power: 2.5W
colour: White light/red light/green light/blue light/yellow light
specifications: 68*42MM
Luminous angle: 160°
Waterproof level: IP65
Product certificate: CE ROHS FCC
Cascade quantity: 20pcs

Shenzhen Huilong Optoelectronics Co., Ltd.

Decorative Light Strip Series

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-COB-RGB-IC



Product model: HL-COB-RGB-IC
voltage: DC12V
power: 8W
colour: FULL COLOR
specifications: 8MM
Luminous angle: 140°
Waterproof level: IP33
Product certificate: CE ROHS FCC
Cascade quantity: 5M/roll
output voltage: 12V

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1M120-2835-S



Product model: HL-1M120-2835-S
voltage: DC12V/24V
current: 120mA
power: 9.6W
colour: White light/red light/green light/blue light/yellow light
specifications: 6MM
Luminous angle: 140°
Waterproof level: IP33
Luminous and bright: 1200LM/米
Product certificate: CE ROHS FCC
Cascade quantity: 5M/roll
output voltage: 12V

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F1060SMD2835



Product model: HL-1M60 SMD2835
voltage: DC12V/24V
power: 0.96W/米
colour: White light/red light/green light/blue light/yellow light
specifications: 12MM
Luminous angle: 150°
Waterproof level: IP68
Product certificate: CE ROHS FCC CB
Cascade quantity: 5M/roll

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1M60 SMD5054



Product model: HL-1M60 SMD5054
voltage: DC12V
power: 10W
colour: White light/red light/green light/blue light/yellow light
Luminous angle: 140°
Waterproof level: IP33
Product certificate: CE ROHS FCC CB
Cascade quantity: 5M/roll
size: 10MM

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-COB



Product model: HL-COB
voltage: DC12V/24V
power: 10W
colour: 3000K/4000K/6000K/10000K
Luminous angle: 150°
Waterproof level: IP33
Product certificate: CE ROHS FCC CB
Cascade quantity: 5M/roll

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-12*12Linear light strip



Product model: HL-1M120D-2835
voltage: DC12V/24V
power: 9W/米
colour: 白光/红光/绿光/蓝光/黄光
specifications: 12*12MM
Luminous angle: 170°
Waterproof level: IP68
Luminous and bright: 2400LM/米
Product certificate: CE ROHS FCC
Cascade quantity: 5M/roll

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1M120 SMD2835 -4mm



Product model: HL-1M120 SMD2835
voltage: DC12V/24V
current: 120mA
colour: White light/red light/green light/blue light/yellow light
specifications: 4mm
Waterproof level: IP33
Luminous and bright: 2400LM/M
Product certificate: CE ROHS FCC
output power: 9.6W

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F1M60 SMD5050



Product model: HL-F1M60 SMD5050
power: 14.4W/M
colour: White light/red light/green light/blue light/yellow light
specifications: 10MM
Luminous angle: 150°
Waterproof level: IP65
Cascade quantity: 5M/roll
output voltage: 12-24V

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-B1M120 SMD3014-Sidelight



Product model: HL-1M120 SMD2835
voltage: DC12V
power: 9W/M
colour: 3000K/4000K/6000K/10000K
specifications: 6
Waterproof level: IP33
Cascade quantity: 5M/roll

Shenzhen Huilong Optoelectronics Co., Ltd.


HL-1M60 SMD2835



Product model: HL-1M60 SMD2835
voltage: DC12V/24V
power: 6W/M
colour: White light/red light/green light/blue light/yellow light
specifications: 8MM
Waterproof level: IP33
Luminous and bright: 1200LM/M
Product certificate: CE ROHS FCC CB
Cascade quantity: 5M/roll

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1M120 SMD2835

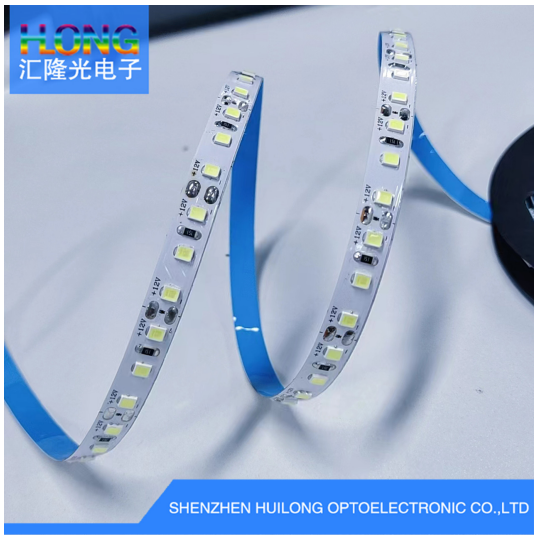

Product model: HL-1M120 SMD2835
voltage: DC12V/24V
colour: White light/red light/green light/blue light/yellow light
specifications: 8MM
Waterproof level: IP33
Product certificate: CE ROHS FCC CB
Cascade quantity: 5M/roll

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-1M60 SMD5050



Product model: HL-1M60 SMD5050
voltage: DC12V/24V
current: 1200mA
power: 14.4W/M
colour: White light/red light/green light/blue light/yellow light
specifications: 10MM
Luminous angle: 150°
Waterproof level: IP33
Luminous and bright: 1320LM/M
Product certificate: CE ROHS FCC CB
Cascade quantity: 5M/roll

Shenzhen Huilong Optoelectronics Co., Ltd.

Power Controller Series

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F120400W



output voltage: 12V
output power: 400W
input voltage: 100-240VAC
Waterproof level: IP68

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F12300W





Product model: HL-F12300W
output voltage: 12V
output power: 300W
input voltage: 100-240VAC
Waterproof level: IP68

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F12200W



SHENZHEN HUILONG OPTOELECTRONIC CO.,LTD

Product model: HL-F12200W
output voltage: 12V
output power: 200W
input voltage: 100-240VAC
Waterproof level: IP68

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F12100W




Product model: HL-F12100W
colour: 银色
Waterproof level: IP68
Product certificate: CE ROHS FCC CB
output voltage: 12V
output power: 100W
input voltage: 100-240VAC
Waterproof level: IP68

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F1260W

output voltage: 12V
output power: 60W
input voltage: 100-240VAC
Waterproof level: IP68

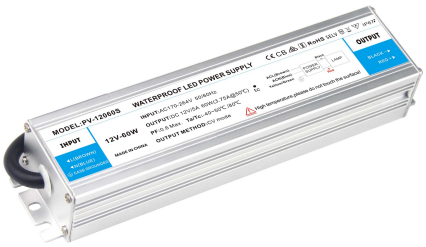



Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F1240W





output voltage: 12V
output power: 40W
input voltage: 100-240VAC
Waterproof level: IP68

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F1230W





Product model: HL-F1230W
output voltage: 12V
output power: 30W
input voltage: 100-240VAC
Waterproof level: IP68

Shenzhen Huilong Optoelectronics Co., Ltd.

HL-F1220W





Product model: HL-F1220W
output voltage: 12V
output power: 20W
input voltage: 100-240VAC
Waterproof level: IP68